O Scale Pedestrian Crosswalk

Item Number 30-9053

The RailKing Pedestrian Crosswalk isavailableintwosizes:thesingle-tracksize (Item No.30-9053) and the double-track size(Item No. 30-9066). Bothareeasy to assemble following the directions given.

Assembly:

Alignscrew posts oncrosswalkendand stairway, andpush together until flush. Insert screwsbyhandtosecure.



Installation:

Mounting onto Platform:

- •The crosswalk is designed to hide the mounting screws.
- •Placethe enclosed templateondesired location o n layout, and mark mounting screw locations.
- •Remove template and drivefour mounting screws (included) intoplatform where indicated bytemplate, but donotputthemall the way in.
- •Fitthescrewheadsinto theround parts of the fourmountingholes, then slide the crosswalk ¹/₄" tolock it into place.

Height Clearance:

• Fromtop of Real Trax center rail tobottom of crosswalk: 5 7/8"

Note: Thismeasurement mayvarydependingonyour track system. Please measure your clearance before you attempt to run tallmodels under the cross walk.



Single Track Pedestrian Crosswalk ItemNumber 30-9053

Placement:

We recommend that you install the crosswalkover straighttracksectionsonly.

One-Track Crosswalk:

• Center crosswalk over track for maximum clearance.


Two-Track Crosswalk:


- Center crosswalk over tracksformaximum clearance.
- Forbest results, parallel tracks should measure 4.5 inches from center railtocenter rail.

Note:the crosswalk length has beenmeasured to correspond with RealTraxtrackbedwidth. To center1-trackcrosswalk overRealTrax,align edgesof trackbed withcorner wheresteps give waytoflatcrosswalk. To center 2-track crosswalk overRealTrax and ensure the recommended 4.5 inches between centerrails, align outer edge of each trackbed with corner wheresteps give wayto flatcrosswalk. 2 Track Dedestrian Crosswalk

2-TrackPedestrian Crosswalk ItemNumber 30-9066



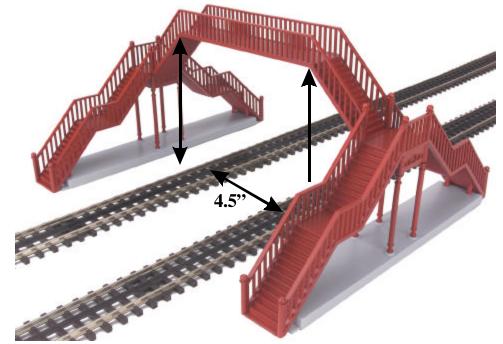



ToobtainWarrantyService, please visit our webitewww.railking.com